


# 5.0x3.2mm SMD Crystal CC Series

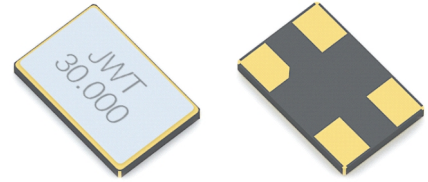

## Product Features

1. High precision, Stability, Consistency
2. Ultra miniaturization
3. ROHS/REACH Compliant
4. Wide operating temperature

## Applications





1. Traditional household appliances
2. Industrial control
3. Network communication

## Specifications

Model	CC5032		
Nominal frequency range	8.000~54.000MHz		
Oscillation mode	Fundamental (AT-cut)		
Frequency tolerance at 25°C±3°C	±10ppm		
Operating temperature range	-20°C~70°C	-40°C~85°C	-40°C~125°C
Frequency stability over temperature(Ref.to 25°C)	±10ppm	±20ppm	±30ppm
Storage temperature range	-55°C~125°C		
Equivalent series resistance	80~60Ω	8.000~10.999MHz	
	60~40Ω	11.000~11.999MHz	
	40~30Ω	12.000~24.999MHz	
	30~20Ω	25.000~54.000MHz	
Load capacitance	Customized		
Shunt capacitance max	5.0pF		
Drive level max	500uW		
Aging at first year	±3.0ppm		

Notes: The above parameters are for normal demands, If you have any different demands, Please contact us.

## Dimensions (Unit: mm)



Pin	Function
#1	Xtal
#2	GND
#3	Xtal
#4	GND